





Endure
Worthy
Stronger





Vision

To set a new standard of quality and service, This should have various choices of international quality lifting & rigging product suited specifically for your needs. No matter how small each part is, each and every part of those products has been carefully selected and providing customized services made for your desire.

Company

Spica international Company Limited was established in the year 2000 as a worldwide certified distributor from elite manufacturing firms all around the world. Accredited by ISO 9001, the company were making world-class quality products available for local consumption usage with a mission of providing the difference and ultimately be the different in both our product's quality and especially our services.


Enriched with more than fourteen years of experience, we have come to realize your needs in certified product's quality and dedicated services. With our mission in mind, Spica International Company Limited provide a full range of service including product consulting and needs analysis to define the most suitable products for you. The comprehensive transportation management, we provide on-demand delivery service. We know these services are essential to your business, thus we sincerely believe that we are what you need. Your needs and our services, they are the same.

Our Product

1. Steel Wire, Strands, Ropes
2. LGM Electric Wire Hoist
3. Ground Wires
4. Fabricated Steels
5. Fishing & Marine Accessories
6. Preformed Helical Products & Accessories



Preformed Guy-Grips Deadends

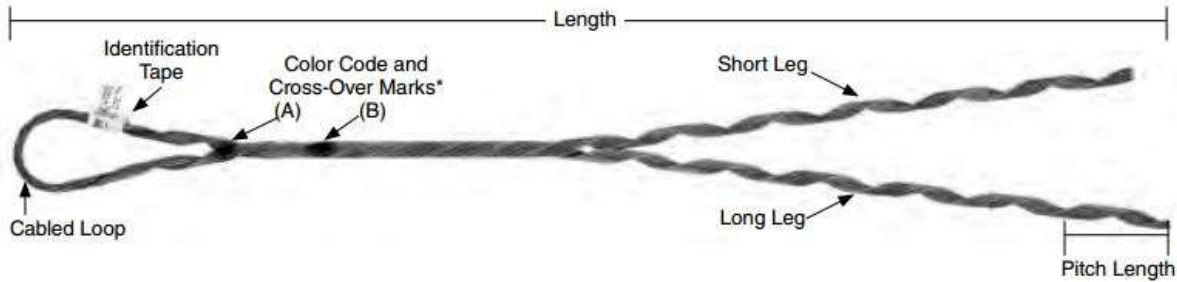

Sizing Code	Strand 7 – wire Mean Dia. Inches (mm.)	Length* Inches (cm.)	Colour code	Breaking Strength		Std.Pkg PCs/Bx
				pounds	Kgf.	
2 M	1/8 (3.18)	17 (43.18)	White	1,830	830	50
2.5 M	5/32 (3.97)	18 (45.72)	Blue	2,940	1,333	50
3 M	3/16 (4.76)	20 (50.80)	Red	3,990	1,809	50
4 M	1/4 (6.35)	25 (63.50)	Yellow	6,650	3,016	50
6 M	5/16 (7.94)	31 (78.74)	Black	11,200	5,079	50
10 M	3/8 (9.53)	35 (88.90)	Orange	15,400	6,984	50
70 mm ²	7/16 (11.11)	38 (96.52)	Green	20,800	9,433	50

Nomenclature

Cross-over Marks: Indicate starting point for application.

Color Code and Length: Assist in identification of conductor size, corresponding To tabular information appearing on catalog pages.

Identification tape: Shows catalog number, nominal sizes.

Safety Considerations

1. This product is intended for a single (one-time) use and for the specified application, although may be reapplied twice for retensioning within 90 days of initial installation. CAUTION: DO NOT MODIFY OR REUSE THIS PRODUCT AFTER 90 DAYS UNDER ANY CIRCUMSTANCES.
2. This product is intended for use by trained craftspeople only. This product SHOULD NOT BE USED by anyone who is not familiar with and trained in the use of it.
3. When working in the area of energized lines with this product, EXTRA CARE should be taken to prevent accident electrical contact.
4. For PROPER PERFORMANCE AND PERSONAL SAFETY be sure to select the proper size Distribution-Grip Dead-end before application.
5. Distribution-Grip Dead-ends are precision devices. To insure proper performance, they should be stored in cartons under cover and handled carefully.



Preformed False Deadends



Code	Strand 7 – wire Mean Dia. Inches (mm.)	Length* Inches (cm.)	Colour code	Breaking Strength		Std.Pkg PCs/Bx
				pounds	Kgf.	
FD0001	1/8 (3.18)	29 (73.66)	White	1,830	830	50
FD0002	5/32 (3.97)	31 (78.74)	Blue	2,940	1,333	50
FD0003	3/16 (4.76)	33 (83.82)	Red	3,990	1,809	50
FD0004	1/4 (6.35)	36 (91.44)	Yellow	6,650	3,016	50
FD0005	5/16 (7.94)	39 (99.06)	Black	11,200	5,079	50
FD0006	3/8 (9.53)	42 (106.68)	Orange	15,400	6,984	50
FD0007	7/16 (11.11)	48 (121.92)	Green	20,800	9,433	50

Nomenclature

Cross-over Marks: Indicate starting point for application.

Color Code and Length: Assist in identification of conductor size, corresponding To tabular information appearing on catalog pages.


Identification tape: Shows catalog number, nominal sizes.

Safety Considerations

1. This product is intended for a single (one-time) use and for the specified application, although may be reapplied twice for retensioning within 90 days of initial installation. CAUTION: DO NOT MODIFY OR REUSE THIS PRODUCT AFTER 90 DAYS UNDER ANY CIRCUMSTANCES.
2. This product is intended for use by trained craftspeople only. This product SHOULD NOT BE USED by anyone who is not familiar with and trained in the use of it.
3. When working in the area of energized lines with this product, EXTRA CARE should be taken to prevent accident electrical contact.
4. For PROPER PERFORMANCE AND PERSONAL SAFETY be sure to select the proper size Distribution-Grip Dead-end before application.
5. Distribution-Grip Dead-ends are precision devices. To insure proper performance, they should be stored in cartons under cover and handled carefully.



Preformed Deadends For ADSS OFC

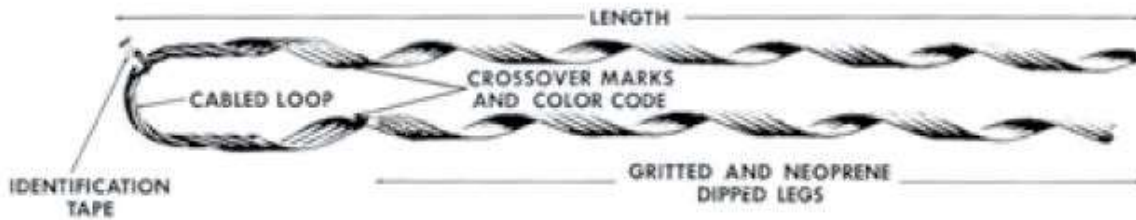

Code	Cable Diameter Range mm.	Min. Length (L) cm.	Colour code	OFC (Fibers)
DA0001	$10.5 < D \leq 11.5$	90	White	12-24
DA0002	$11.5 < D \leq 12.5$	90	Blue	36-60
DA0003	$12.5 < D \leq 13.5$	90	Red	72-84
DA0004	$13.5 < D \leq 14.5$	90	Yellow	96-108
DA0005	$14.5 < D \leq 15.5$	90	Black	120
DA0006	$15.5 < D \leq 16.5$	90	Orange	≥ 120
DA0007	$16.5 < D \leq 17.5$	90	Green	≥ 120
DA0008	$17.5 < D \leq 18.5$	90	Brown	≥ 120
DA0009	$18.5 < D \leq 19.5$	90	Violet	≥ 120

Nomenclature

Cross-over Marks: Indicate starting point for application.

Color Code and Length: Assist in identification of conductor size, corresponding To tabular information appearing on catalog pages.


Identification tape: Shows catalog number, nominal sizes.

Safety Considerations

1. This product is intended for a single (one-time) use and for the specified application, although may be reapplied twice for retensioning within 90 days of initial installation. CAUTION: DO NOT MODIFY OR REUSE THIS PRODUCT AFTER 90 DAYS UNDER ANY CIRCUMSTANCES.
2. This product is intended for use by trained craftspeople only. This product SHOULD NOT BE USED by anyone who is not familiar with and trained in the use of it.
3. When working in the area of energized lines with this product, EXTRA CARE should be taken to prevent accident electrical contact.
4. For PROPER PERFORMANCE AND PERSONAL SAFETY be sure to select the proper size Distribution-Grip Dead-end before application.
5. Distribution-Grip Dead-ends are precision devices. To insure proper performance, they should be stored in cartons under cover and handled carefully.



Thimble Preformed Suspension for Self-Support Cable (ADSS/ARSS)

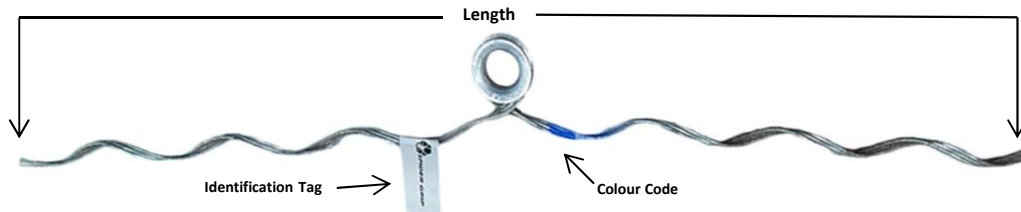

Code	Cable Diameter Range mm.	Min Rod Qty. (Rods)	Min. Length (L) cm.	Colour code	ADSS (Fibers)	ARSS (Fibers)
DA0001	10.5 < D ≤ 11.5	3	90	White	12-24	-
DA0002	11.5 < D ≤ 12.5	3	90	Blue	36-60	12-24
DA0003	12.5 < D ≤ 13.5	3	90	Red	72-84	36-72
DA0004	13.5 < D ≤ 14.5	3	90	Yellow	96-108	-
DA0005	14.5 < D ≤ 15.5	3	90	Black	120	84-96
DA0006	15.5 < D ≤ 16.5	3	90	Orange	≥120	-
DA0007	16.5 < D ≤ 17.5	3	90	Green	≥120	108-120
DA0008	17.5 < D ≤ 18.5	3	90	Brown	≥120	-
DA0009	18.5 < D ≤ 19.5	3	90	Violet	≥120	-

Nomenclature

Cross-over Marks: Indicate starting point for application.

Color Code and Length: Assist in identification of conductor size, corresponding To tabular information appearing on catalog pages.


Identification tape: Shows catalog number, nominal sizes.

Safety Considerations

1. This product is intended for a single (one-time) use and for the specified application, although may be reapplied twice for retensioning within 90 days of initial installation. CAUTION: DO NOT MODIFY OR REUSE THIS PRODUCT AFTER 90 DAYS UNDER ANY CIRCUMSTANCES.
2. This product is intended for use by trained craftspeople only. This product SHOULD NOT BE USED by anyone who is not familiar with and trained in the use of it.
3. When working in the area of energized lines with this product, EXTRA CARE should be taken to prevent accident electrical contact.
4. For PROPER PERFORMANCE AND PERSONAL SAFETY be sure to select the proper size Distribution-Grip Dead-end before application.
5. Distribution-Grip Dead-ends are precision devices. To insure proper performance, they should be stored in cartons under cover and handled carefully.



Strand Spices

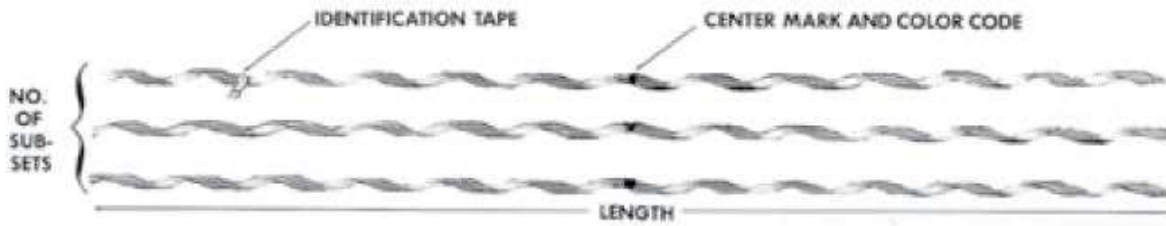

Code	Strand 7 – wire Mean Dia. Inches (mm.)	Length* Inches (cm.)	Colour code	Breaking Strength		Std.Pkg PCs/Bx
				pounds	Kgf.	
SS0001	1/8 (3.18)	22 (55.88)	White	1,830	830	50
SS0002	5/32 (3.97)	25 (63.50)	Blue	2,940	1,333	50
SS0003	3/16 (4.76)	27 (68.58)	Red	3,990	1,809	50
SS0004	1/4 (6.35)	35 (88.90)	Yellow	6,650	3,016	50
SS0005	5/16 (7.94)	42 (106.68)	Black	11,200	5,079	50
SS0006	3/8 (9.53)	50 (127.00)	Orange	15,400	6,984	50

Nomenclature

Cross-over Marks: Indicate starting point for application.

Color Code and Length: Assist in identification of conductor size, corresponding to tabular information appearing on catalog pages.


Identification tape: Shows catalog number, nominal sizes.

Safety Considerations

1. This product is intended for a single (one-time) use and for the specified application, although may be reapplied twice for retensioning within 90 days of initial installation. CAUTION: DO NOT MODIFY OR REUSE THIS PRODUCT AFTER 90 DAYS UNDER ANY CIRCUMSTANCES.
2. This product is intended for use by trained craftspeople only. This product SHOULD NOT BE USED by anyone who is not familiar with and trained in the use of it.
3. When working in the area of energized lines with this product, EXTRA CARE should be taken to prevent accident electrical contact.
4. For PROPER PERFORMANCE AND PERSONAL SAFETY be sure to select the proper size Distribution-Grip Dead-end before application.
5. Distribution-Grip Dead-ends are precision devices. To insure proper performance, they should be stored in cartons under cover and handled carefully.



Strand Spices For ADSS OFC

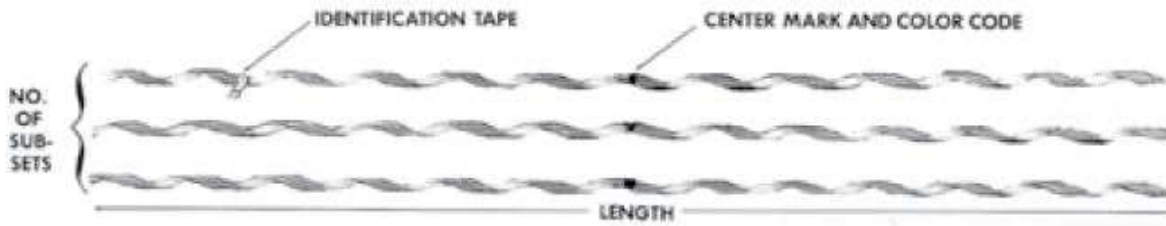

Code	Cable Diameter Range mm.	Min. Length (L) cm.	Colour code	OFC (Fibers)
DA0001	$10.5 < D \leq 11.5$	90	White	12-24
DA0002	$11.5 < D \leq 12.5$	90	Blue	36-60
DA0003	$12.5 < D \leq 13.5$	90	Red	72-84
DA0004	$13.5 < D \leq 14.5$	90	Yellow	96-108
DA0005	$14.5 < D \leq 15.5$	90	Black	120
DA0006	$15.5 < D \leq 16.5$	90	Orange	≥ 120
DA0007	$16.5 < D \leq 17.5$	90	Green	≥ 120
DA0008	$17.5 < D \leq 18.5$	90	Brown	≥ 120
DA0009	$18.5 < D \leq 19.5$	90	Violet	≥ 120

Nomenclature

Cross-over Marks: Indicate starting point for application.

Color Code and Length: Assist in identification of conductor size, corresponding to tabular information appearing on catalog pages.


Identification tape: Shows catalog number, nominal sizes.

Safety Considerations

1. This product is intended for a single (one-time) use and for the specified application, although may be reapplied twice for retensioning within 90 days of initial installation. CAUTION: DO NOT MODIFY OR REUSE THIS PRODUCT AFTER 90 DAYS UNDER ANY CIRCUMSTANCES.
2. This product is intended for use by trained craftspeople only. This product SHOULD NOT BE USED by anyone who is not familiar with and trained in the use of it.
3. When working in the area of energized lines with this product, EXTRA CARE should be taken to prevent accident electrical contact.
4. For PROPER PERFORMANCE AND PERSONAL SAFETY be sure to select the proper size Distribution-Grip Dead-end before application.
5. Distribution-Grip Dead-ends are precision devices. To insure proper performance, they should be stored in cartons under cover and handled carefully.



Preformed Big Grips Deadends

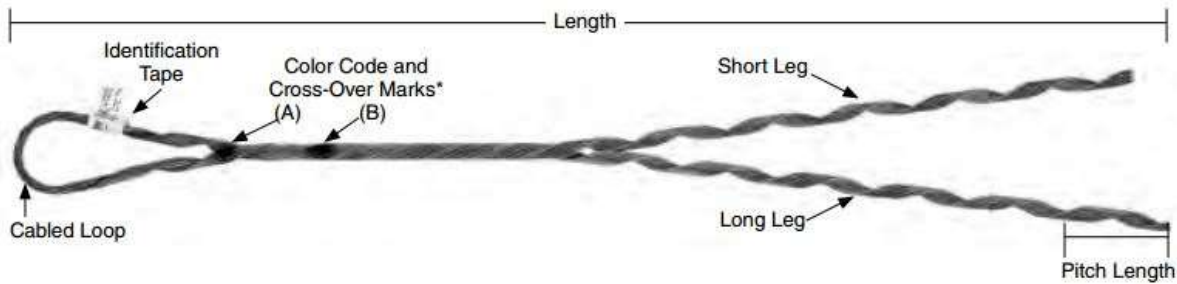

Sizing Code	Diameter in Inch & (mm.)	Length* Inches (cm.)	Colour code	Breaking Strength		Std.Pkg PCs/Bx
				pounds	Kgf.	
1/2 (95mm ²)	'1/2 (12.70)	49 (124.46)	Blue	26,900	12,200	50
9/16	'9/16 (14.29)	55 (139.70)	Yellow	35,000	15,876	30
5/8	'5/8 (15.88)	64 (162.56)	Black	40,200	18,235	30
3/4	'3/4 (19.05)	76 (193.04)	Orange	58,300	26,445	30
7/8	'7/8 (22.22)	90 (228.60)	Green	79,700	36,152	20
1	1 (25.40)	125 (317.50)	Blue	92,430	41,926	20

Nomenclature

Cross-over Marks: Indicate starting point for application.

Color Code and Length: Assist in identification of conductor size, corresponding To tabular information appearing on catalog pages.

Identification tape: Shows catalog number, nominal sizes.

Safety Considerations

1. This product is intended for a single (one-time) use and for the specified application, although may be reapplied twice for retensioning within 90 days of initial installation. CAUTION: DO NOT MODIFY OR REUSE THIS PRODUCT AFTER 90 DAYS UNDER ANY CIRCUMSTANCES.
2. This product is intended for use by trained craftspeople only. This product SHOULD NOT BE USED by anyone who is not familiar with and trained in the use of it.
3. When working in the area of energized lines with this product, EXTRA CARE should be taken to prevent accident electrical contact.
4. For PROPER PERFORMANCE AND PERSONAL SAFETY be sure to select the proper size Distribution-Grip Dead-end before application.
5. Distribution-Grip Dead-ends are precision devices. To insure proper performance, they should be stored in cartons under cover and handled carefully.

